

Charges the battery and loads data from smartphones or hard drives in 5 Gbit/s and over many years. The reason: a strong plug, gold-plated connectors and a flexible triple shielded premium cable.



# A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic USB- $\mathbb{C}^{\mathbb{M}}$  to USB-A 3.2 Gen 1 adapter cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

# GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 Carat gold. This prevents them from oxidising. Plus: unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.

# TRIPLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the triple shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.

# TC INNER CONDUCTORS FOR MAXIMUM SIGNAL QUALITY

Pin-sharp images, brilliant audio – even after years: The copper inner conductors are covered with a thin layer of tin (TC) to prevent them from coming into contact with water and oxygen. This means that they do not oxidise or corrode and they transmit signals excellently, just like on the very first day.

# A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic USB- $C^{\mathbb{T}}$  to USB-A 3.2 Gen 1 adapter cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

SUBJECT TO CHANGE. MODEL SIMILAR. USB TYPE-C" AND USB-C" ARE REGISTERED TRADEMARKS OF THE USB IMPLEMENTERS FORUM.
ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.



# USB-C™ TO USB-A 3.2 GEN 1 ADAPTER CABLE



# LOADS DATA AND CHARGES THE BATTERY


Two become one. The Clicktronic USB-C™ to USB-A 3.2 Gen 1 adapter cable allows you to charge your battery in high speed while also loading your data from hard drives or smartphones – with SuperSpeed USB 3.1 and thus with up to 5 Gbit / s,  $10 \times$  faster than with USB 2.0. Simple and convenient thanks to the Type-C plug. The result: your devices always have plenty of power and all of the images and files arrive safely.

# EASY TO INSERT AND FUTURE-PROOF

The USB- $\mathbb{C}^{\mathbb{M}}$  plug is designed not to have a top and bottom. This makes it particularly easy to insert – in a wide range of devices from hard drives to smartphones. It is thus also particularly future-proof.



INPUT



OUTPUT

# ALL ADVANTAGES AT A GLANCE

## FAST AND COMPATIBLE

Transfers data form hard drives, smartphones and accessories with up to 5 Gbit/s.

#### EASY TO INSERT

The USB-C™ plug with the same top and hottom

## **BRILLIANT SIGNAL QUALITY**

Does not corrode or oxidise thanks to a tinned copper inner conductor (TC).

#### NO FLICKERING

Thanks to triple insulation.

# FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

## STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

#### **RUST-FREE CONNECTOR**

Even after years – thanks to a 24 Carat gold coating.

SUBJECT TO CHANGE. MODEL SIMILAR. USB TYPE-C" AND USB-C" ARE REGISTERED TRADEMARKS OF THE USB IMPLEMENTERS FORUM. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.




# USB-C™ TO USB-A 3.2 GEN 1 ADAPTER CABLE


# SIGNAL TRANSMISSION

TRANSMISSION TYPES: digital data MAX. TRANSMISSION RATE (Gbit/s): 5.0

# CABLE CROSS-SECTION



# CIRCUIT DIAGRAM

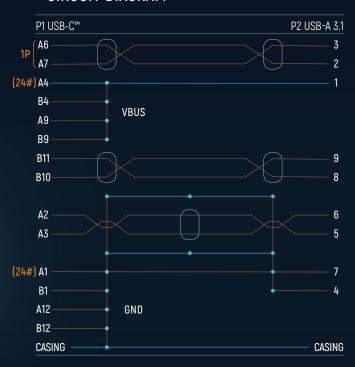

# SUPPORTED STANDARDS

USB 3.0 (SuperSpeed), USB 2.0 (Hi-Speed)

# PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET
0.5 – 3 m	7 × 0.08 mm	32	4.8 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
0.5 m	16.99€	1/20/40	45123	4040849451232
1.0 m	19.99€	1/20/40	45124	4040849451249
2.0 m	24.99€	1/20/40	45125	4040849451256
3.0 m	29.99€	1/15/30	45126	4040849451263

SUBJECT TO CHANGE. MODEL SIMILAR. USB TYPE-C\*\* AND USB-C\*\* ARE REGISTERED TRADEMARKS OF THE USB IMPLEMENTERS FORUM ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.