

marantz®



PM7000N INTEGRATED STEREO AMPLIFIER WITH HEOS BUILT-IN


Discover the PM7000N, the first Marantz Current Feedback integrated Hi-Fi amplifier with HEOS Built-in technology. The ideal choice for audio connoisseurs, the PM7000N includes high-grade audio components, Marantz own HDAMs, a toroidal transformer and a high-speed instantaneous current power supply. Stream your favourite music and enjoy high-resolution digital audio files up to 192kHz/24bit or DSD5.6. Switch to the high quality Phono MM input to listen to your beloved vinyls as never before.

Highlights

- Integrated Current Feedback Amplifier with 2x 60W / 8 ohm rms
- Marantz proprietary HDAM-SA3 circuit
- Shielded Toroidal Transformer
- Built-in Bluetooth and AirPlay 2
- HEOS Built-in wireless music streaming
- Wide range of connectivity
- High-performance, high-resolution audio playback
- Play vinyl with exceptional clarity
- Fully shielded digital and network section with the option to deactivate
- Premium Marantz SPKT-1+ speaker terminals

Your Benefits

- Wide bandwidth reproduction to fill your room with renowned Marantz sound
- Wide dynamic range and famous Marantz soundstage
- Delivering high level of clean power for pure amplification without distortion
- Access to almost unlimited music sources via your smartphone
- Play nearly unlimited music from your favourite streaming services like Spotify Free and Premium, Amazon Music, Deezer, Tunes Internet Radio and more with the comfortable HEOS app
- Four analogue inputs, one coaxial input, two optical digital inputs and one USB-A for high resolution audio files
- Supports high-resolution audio ALAC, FLAC and WAV lossless files up to 24-bit/192-kHz – plus, DSD 2.8MHz and 5.6MHz tracks for high-resolution listening
- Integrated phono input with newly designed FET input stage to improve signal purity and improve sound
- Minimises the risk of interference by digital section to achieve highest audio performance and a pure analogue experience
- Improved connection to speakers for high quality playback

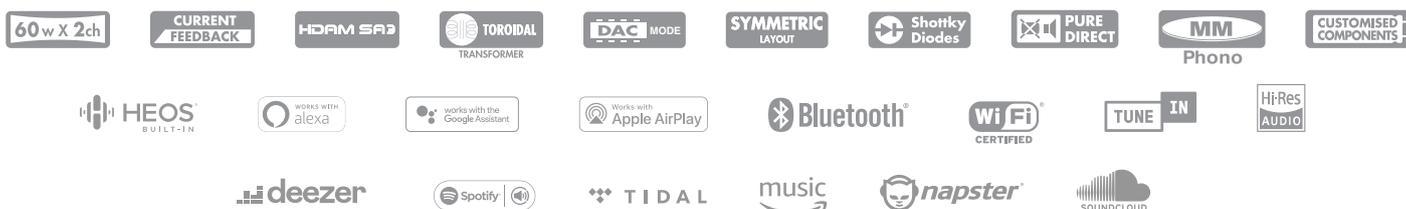

because music matters

PM7000N INTEGRATED STEREO AMPLIFIER WITH HEOS BUILT-IN



FEATURES	PM7000N
AUDIO	
Channels	2
Current Feedback Topology	•
Phono EQ	OP amp + FET input stage
HDAM version	HDAM-SA3, SA2
Power Transformer	Toroidal
High Grade Audio Components	•
Customised Components	•
Symmetric PCB Layout	•
Aluminium Extrusion Heat Sink	•
Shield Case for Digital Circuit	•
Tone Control (Bass / Treble)	•
Source Direct / Balance	• / •
Pure Modes	3
INPUTS/OUTPUTS	
Audio Inputs	4
Phono Input: MM	•
Optical / Coaxial	2 / 1
USB-A	1 (rear)
Recorder Out	•
Pre-out	Subwoofer
Gold Plated Cinch	•
Speaker Terminals	Marantz SPKT-1+
Number of Terminals	1 pair
Remote Control Bus Terminal	•
Headphone Out	• (Front)
NETWORK	
HEOS Multi-Room and Streaming / Network Audio Streaming	• / •
Lossy Formats: MP3 / WMA / AAC	• / • / •
Lossless Formats: FLAC / ALAC / WAV	• / • / •
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
DSD Audio Streaming	up to DSD5.6
Gapless Playback	• (FLAC, WAV, ALAC, DSD)
AirPlay2 Audio Streaming	•
Internet Radio (Tune In)	• (TuneIn)
Spotify Connect, Deezer, TIDAL, Napster, Soundcloud*	• / • / • / • / •
Supported Voice Agents: Alexa/Google Assistant/Siri	• / • / •
Compatible with Remote APP (iOS/Android)	HEOS
Ethernet / Wi-Fi	• / • (dual antenna/dual band)
Bluetooth	•

SPECIFICATIONS	
Power Output (8 ohm)	60 W
Power Output (4 ohm)	80 W
Frequency Response	5 Hz – 100 kHz ±3 dB
Total Harmonic Distortion (8 ohm, 20 Hz - 20 kHz)	0.02%
Damping Factor (8 ohm, 20 Hz - 20 kHz)	100 and over
Input Sensitivity: MM	2.0 mV / 47 kΩ/kohms
Signal to Noise Ratio: MM	87 dB (5 mV input, 1 W output)
Input Sensitivity: High Level	220 mV/18 kΩ
Signal to Noise Ratio: High Level	115 dB (2 V input, rated output)
OTHERS	
FL Display	3 line OLED
Variable Cross Over (subwoofer)	• (40/60/80/100/120Hz)
IR Learning for TV remote	•
Auto Power On / Off	Optical In 1 / Optical In 2 / Coaxial In (Default: OFF)
Sleep Timer	•
GENERAL	
Available Colours	Black / Silver-Gold
Metal Front Panel	•
Power Consumption	220W
Standby Consumption (network control on)	4.6W
Standby Consumption	0.3W
Detachable Power Cable	•
Remote Control	•
System Remote Function	•
Maximum Dimensions (W x D x H)	440 x 379 x 125mm *excluding antennas
Dimensions Packed (W x D x H)	547 x 469 x 235mm
Weight	10.8kg
Weight packed	12.3kg
EAN	
EU	PM7000N/N1B 4951035071045 Black
	PM7000N/N1SG 4951035071052 Silver-Gold
UK	PM7000N/T1B 4951095071122 Black
	PM7000N/T1SG 4951095071139 Silver-Gold

Sound United Europe
A Division of D&M Europe B.V.
Beemdstraat 11
5653 MA Eindhoven
The Netherlands

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

*Design and specifications are subject to change by Marantz without notice.