

ViewSonic® VIEWBOARD IFP5550-3


Key Features

- Intuitive Interactive Interface and Eye-care Certified Display
- Synchronous Writing Performance with Dual Pens
- Lag-free, Pen-on-paper Writing Experience with Ultra Fine Touch Technology
- Native Whiteboarding Tool with built-in myViewBoard® App
- Wireless Content Sharing and 4-way Split Screen with ViewBoard® Cast App



Product Description

For teachers in the modern classroom, the ViewBoard® IFP50 series has the most intuitive interactive interface. It keeps continuous interaction within the first vision area and keeps everything within comfortable reach. Additionally, it is an eye-care certified display with low blue light and flicker-free at all brightness levels. The ViewBoard® IFP50 series further stands out with synchronous writing performance. You can write smoothly, with the pen that serves as an extension of your fingertips, and simultaneously with the equipped dual pens of different colors and thicknesses. The native built-in whiteboarding tool, myViewBoard®, further helps visualize your ideas with ease. The ViewBoard® IFP50 series is further complimented by wireless content sharing. Students can share their screens to the ViewBoard and vice versa with the built-in ViewBoard® Cast app. It is not limited to one-on-one presentation either. Teachers can advance to do group activities with the 4-way split-screen display. Whether you've experienced good or lackluster classroom interaction in the digital whiteboarding world, the ViewBoard® IFP50 series will now allow you to work effortlessly in the classroom.

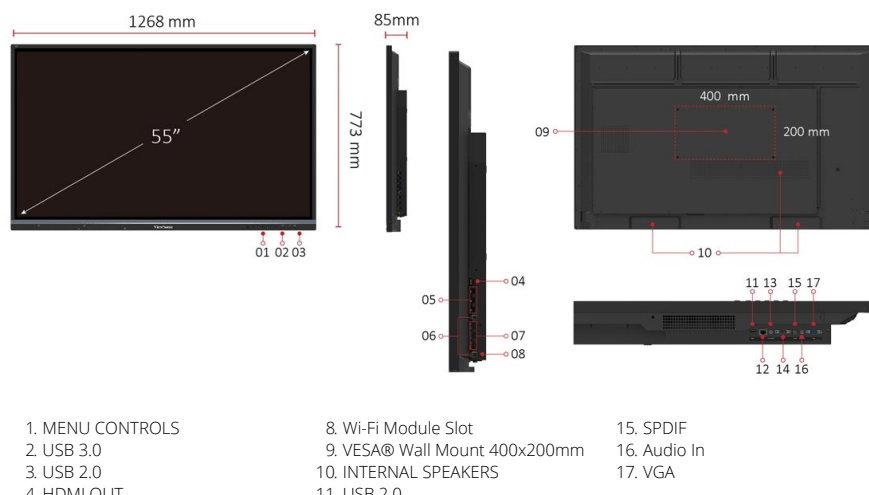

4. HDMI OUT

5. USB 3.0

6. TOUCH

7. HDMI IN X 3
11. USB 2.0

12. LAN

13. Audio Out

14. RS232

Visit Us  www.viewsonic.com

DISPLAY

| | |
|--------------------|---|
| Panel Size: | 55" |
| Type/Tech: | TFT LCD Module with DLED Backlight. |
| Display Area (mm): | 1209.6 (H) x 680.4 (V) (54.64" diagonal) |
| Aspect Ratio: | 16:9 |
| Native Resolution: | UHD 3840x2160 (Pixels) |
| Colors: | 1.07B colors (10bit) |
| Brightness: | 350 nits (typ.) |
| Contrast Ratio: | 5000:1 (DCR) |
| Response Time: | 8ms |
| Viewing Angles: | H = 178, V = 178 typ. |
| Backlight Life: | 30,000 Hours (Min) |
| Surface Treatment: | Hardness: 7H, Anti-glare coating |
| Bezel: | Slim |
| Orientation: | Landscape |

PLATFORM

| | |
|------------|---------------------------------------|
| Processor: | ARM Cortex-A73*2 + Cortex-A53*2 1.5Hz |
| RAM: | 3GB DDR4 |
| Storage: | 32GB |

TOUCH

| | |
|-------------------|------------------------------------|
| Type/ Tech: | IR Recognition |
| Touch Resolution: | 32767 x 32767 |
| Touch Point: | 20 points touch, 10 points writing |

INPUT

| | |
|------------|--------------------------|
| HDMI: | 2.0 x3 (3840x2160 @60Hz) |
| RGB / VGA: | x1 |
| Audio: | x1 (PC audio in) |
| RS232: | x1 |
| OPS: | x1 PC Slot (proprietary) |

OUTPUT

| | |
|--------|-------------------|
| HDMI: | x1 (4K/60Hz) |
| Audio: | x1 (Earphone out) |
| SPDIF: | 1(optical) |

LAN

| | |
|-------|----|
| RJ45: | x1 |
|-------|----|

USB

| | |
|---------|--|
| Type A: | USB2.0: Front x2, Rear x1 (SmartPort™ for all), USB3.0: Front x1, Rear x3 (SmartPort™ for Rear x3) |
| Type B: | x2, for touch |

SPEAKERS

| |
|-------------------|
| 10W x 2 + 15W x 1 |
|-------------------|

TOP CAMERA PLATE

| |
|-----|
| Yes |
|-----|

COMPATIBILITY

| | |
|-------|-----------|
| HDMI: | 3840x2160 |
|-------|-----------|

EMBEDDED OS

| |
|-----------|
| Android 8 |
|-----------|

BUNDLE SOFTWARE

| | |
|----------------------------|--|
| Basic Annotation Software: | myViewBoard |
| Pro Annotation Software: | myViewBoard for Windows (Embedded in Windows Slot-in PC) |

SPECIAL FEATURES

| | |
|--|--|
| All-in-one USB port (combine Windows/Android USB port; no need to distinguish them anymore): | Front "SmartPort™ USB" to all channels. |
| Simple LAN sharing between IFP and slot-in device: | 10M/100M/ for Android, 10M/100M/1000M for slot-in PC |

POWER

| | |
|----------|-------------------------------|
| Voltage: | 100-240VAC +/- 10% Wide Range |
|----------|-------------------------------|

ERGONOMICS

| | |
|---------------------|-----------|
| Wall Mount (VESA®): | 400 x 200 |
|---------------------|-----------|

OPERATING CONDITIONS

| | |
|--------------------|-----------------------------|
| Temperature (° C): | 0°C to 40°C |
| Humidity: | 10% ~ 90% RH non-condensing |

DIMENSIONS (W X H X D)

| | |
|------------------------|--|
| Physical (inch / mm): | 49.9 x 30.4 x 3.3 in / 1268 x 773 x 85 mm |
| Packaging (inch / mm): | 56.2 x 34.6 x 8.7 in / 1428 x 878 x 220 mm |

WEIGHT

| | |
|------------------|-------------------|
| Net (lb / kg): | 58.2 lb / 26.4 kg |
| Gross (lb / kg): | 78.3 lb / 35.5 kg |

REGULATIONS

| |
|---|
| cTUVus, FCC, ES8, EPEAT, EMC/CE, CB, RoHS & DOC, REACH, WEEE, ErP, EAC, UKrSEPRO, RCM, BSMI |
|---|

PACKAGE CONTENTS

| |
|---|
| 1. Power cable (3 meters) x2 2. Remote control 3. USB cable (3 meters) 4. Touching pen x2 5. Quick Start Guide 6. RS232 adapter 7. Clamp x5 8. Plate 9. Screw x8 10. HDMI cable 3M |
|---|

COMPATIBLE SLOT-IN PC

| |
|---|
| VPC14-WP series, VPC10-WP series, VPC15-WP series, VPC16-WP series, VPC17-WP series |
|---|