

elipson® | Prestige Facet II 11C

ENCEINTE CENTRALE - 2 VOIES - CLOSE



La Prestige Facet II 11C d'Elipson est une enceinte centrale deux voies close, conçue pour offrir une performance acoustique exceptionnelle.

Équipée d'un tweeter de 25 mm et de deux haut-parleurs grave-médium de 140 mm, elle délivre une puissance admissible de 120 W RMS, une réponse en fréquence de 55 Hz à 25 kHz et une sensibilité de 92 dB.

Sa finition satinée moderne, son câblage en cuivre OFC de 2,25 mm² et ses composants de filtre haut de gamme garantissent une restitution sonore précise et dynamique.

Idéale pour les systèmes home cinéma, cette enceinte allie élégance et performance pour une expérience audio immersive.





TECHNIQUE

Type Enceinte centrale - 2 voies - Close	Filtre répartiteur- Fc 3500 Hz - 18 dB / 18 dB
Puissance 120 W RMS	Impédance nominale 6 Ω
Amplification recommandée 30 - 150 W	Impédance minimale 3,8 Ω @ 187 Hz
Haut-parleurs Tweeter : 25 mm Grave-médiums : 2 x 140 mm	Fréquence d'accord bass-reflex Clos
Réponse en fréquence (±3dB) 55 Hz - 25 kHz	Bornier Argentés pour bi-câblage ou bi-amplification
Sensibilité 92dB / 1W / 1m	

DIMENSIONS
POIDS

Dimensions L470 x H176 x P180 mm	Poids 9,1 kg
--	------------------------

PACKAGING

Packaging dimensions L570 x H280 x P280 mm	Poids brut 10,3 kg
--	------------------------------

FINITIONS
-
CODES
PRODUITS

	Finition Noir mat	SKU ELIPF211CMBK	EAN 3700795194454
	Finition Blanc mat	SKU ELIPF211CMWT	EAN 3700795194461
	Finitions Noir mat - Noyer	SKU ELIPF211CWNBK	EAN 3700795194478

elipson® | Prestige Facet II 11C

CENTRE LOUDSPEAKER - 2 WAY - SEALED




The Prestige Facet II 11C from Elipson is a closed two-way centre loudspeaker designed to deliver exceptional acoustic performance..

Fitted with a 1" tweeter and two 5" mid-woofers drivers, it delivers a power handling capacity of 120 W RMS, a frequency response of 55 Hz to 25 kHz and a sensitivity of 92 dB.

Its modern satin finish, 2.25 mm² OFC copper cabling and high-end crossover components guarantee accurate and dynamic sound reproduction.

Ideal for home cinema systems, this speaker combines elegance and performance for an immersive audio experience.

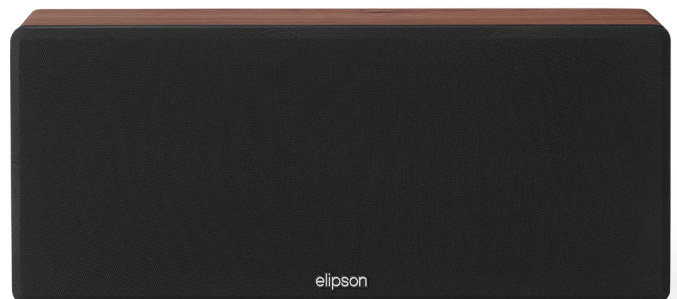



TECHNICAL

Type Centre loudspeaker - 2 way - Sealed	Crossover 3500 Hz - 18 dB / 18 dB
Power 120 W RMS	Nominal impedance 6 Ω
Power amplifier 30 - 150 W	Minimum Impedance 3,8 Ω @ 187 Hz
Drive-Units Tweeter : 1" Mid-woofers : 2 x 5"	Tuned bass-reflex frequency Sealed
Frequency response (±3dB) 55 Hz - 25 kHz	Terminals Silver plated for bi-wiring or bi-amplification
Sensitivity 92dB / 1W / 1m	

DIMENSIONS
WEIGHTS

Dimensions W470 x H176 x D180 mm	Weight 9,1 kg
--	-------------------------

PACKAGING

Packaging dimensions W570 x H280 x D280 mm	Gross weight 10,3 kg
--	--------------------------------

FINISHES
-
PRODUCTS
CODES

	Finish Black matt	SKU ELIPF211CMBK	EAN 3700795194454
	Finish White matt	SKU ELIPF211CMWT	EAN 3700795194461
	Finishes Black matt - Walnut	SKU ELIPF211CWNBK	EAN 3700795194478